

Technical Datasheet
AF-ACID (Non-Metallic)

Compressed Non-Asbestos Fibre (CNAF) Gasket Sheet



Material Composition

Aramid Fibres, Mineral Fibres, Inorganic Fillers.
(Binders: CSM Elastomers)

Application

Suitable for aggressive media with excellent chemical resistance to both acidic and alkaline environments.

Color

White (other color upon request)

Compliance

ASTM F 104 Line call out: F 719911 E19 A9 B3 M6

Standard Dimensions of Sheets

1000 X 1000 mm, 1000 X 1500 mm, 1500 X 1500 mm,
1500 X 2000 mm, 1500 X 2250 mm, 1500 X 3000 mm,
1500 X 4500 mm, 2000 X 2000 mm, 2000 X 3000 mm

Available Thickness

0.30mm to 6.00mm


Operating Condition

Max. Peak Temperature : 400 °C
Max. Operating Temperature : 275 °C
Max. Peak Pressure : 150 bar
Max. Continuous Temp. with steam : 240 °C

Typical Physical Properties Applicable for Thickness 1.50mm

Typical Properties	Test Method	Typical Value	Unit
Density	ASTM F 1315	1.70 – 2.00	g/cm ³
Tensile Strength	ASTM F 152	14.0 (Min.)	N/mm ²
Compressibility	ASTM F 36J	7 – 17	%
Recovery	ASTM F 36J	50 (Min.)	%
Stress Relaxation (175 °C)	BS 7531	22 (Min.)	N/mm ²
Gas Permeability	BS 7531	≤ 1.0	ml/min
Ignition Loss	ASTM F 495	≤ 35.0	%
Acid Resistance			
Thickness Increase			
a.) H ₂ SO ₄ Acid	65% (48h, 23°C)	≤ 15.0	%
b.) H ₂ SO ₄ Acid	96% (18h, 23°C)	≤ 10.0	%
c.) HNO ₃ Acid	40% (48h, 23°C)	≤ 15.0	%

Operating Parameters

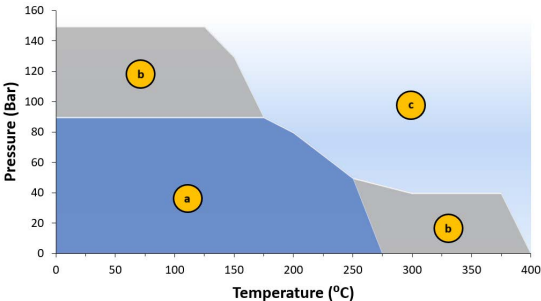

Guidelines for application

Area a: General suitability - Under common installation practices and chemical compatibility.
Area b: Conditional suitability - Technical consultation is recommended.
Area c: Limited suitability - Technical consultation is mandatory

*Size Tolerance: ± 10% | Thickness Tolerance: 0.10mm for <1.00mm & 10% for >1.00mm

All technical data and information are derived from years of industry experience in the production and application of sealing materials. The content is for reference purposes only and does not imply any form of warranty or guarantee. This edition supersedes earlier publications and is subject to revisions without prior notice.